

VESTEL Totem TO Series

Create your own high impact, customized advertising solution with our robust and cost-effective Totems.



Robust Design

Offering an eye-catching as well as robust design, our slim, stand-alone Totem can provide built-in PC functionality, giving you a self-contained content management system.



Double-Sided

Vestel's Totem offers a double sided display option, enabling your branding to reach more people.






Market Specific

Offering a flexible signage solution, our Totem is perfect for a wide variety of applications, working well for multiple vertical markets, such as the transport and entertainment industries.

TO SERIES / SPECIFICATIONS

	TO65SS	TO65DS
Panel		
H-Freq	67.5 kHz	67.5 kHz
Max. Pixel Freq.	74.25 MHz	74.25 MHz
V-Freq	60 Hz	60 Hz
Cabinet	T05	T05
Backlight Type	EDGE TYPE LED (DUAL STRING)	EDGE TYPE LED (DUAL STRING)
Panel Type	a-Si TFT Tv Panel	a-Si TFT Tv Panel
Panel Front Type	Hard Coating	Hard Coating
Orientation	Portrait	Portrait
Resolution	1920 x 1080 (16:9)	1920 x 1080 (16:9)
Active Area	1435.5 (mm) x 810.5 (mm)	1435.5 (mm) x 810.5 (mm)
Brightness (Typ.)	900 cd/m2	900 cd/m2
Contrast Ratio	4000:1	4000:1
Panel life time (Min./Typ.)	30,000 hr / 50,000 Hr	30,000 hr / 50,000 Hr
Viewing Angle	178°	178°
Response Time	8 ms	8 ms
White Uniformity	≤ 25%	≤ 25%
Color Value	10 bit, 1.06B	10 bit, 1.06B
Areas of Usage	Indoor	Indoor
Areas of Usage	Indoor	Indoor
Monitor Connectivity		
External Control	RS232 (D-Sub 9P)	RS232 (D-Sub 9P)
Mechanical Features		
Size w/foot	1028x488x1948(mm)	1028x488x1948(mm)
Size wo/foot	1028x77.5x1718(mm)	1028x77.5x1718(mm)
Product Weight	70 kg	95 kg
Total Weight (with Package)	125 kg	150 kg
Vesa Mounting Size	600 mm x 400 mm	600 mm x 400 mm
Working Conditions		
Temperature Conditions	0°C / +40°C	0°C / +40°C
Humidity (Test Condition)	90%	90%
Storage Conditions		
Temperature Conditions	-15°C / +40°C	-15°C / +40°C
General Features		
Main Features	Pluggable PC (VPS) compliance	Pluggable PC (VPS) compliance
Mechanical Features	Vertical Sleek Design with Stand, Antireflective Clear Glass	Vertical Sleek Design with Stand, Antireflective Clear Glass
Optional Features	Vsign - Content Management Software	Vsign - Content Management Software
Power		
Power Supply	220 - 240 VAC / 50 - 60Hz	220 - 240 VAC / 50 - 60Hz
Power Consumption (Deep StandBy)-Intel OPS	< 3W	< 3W
Power Consumption (On Full Load)-Intel OPS	308 W	616 W
PC Specifications - 1		
VPS		
CPU	Intel i3 4000M	Intel i3 4000M
Chipset	4th Generation Intel HM86 Chipset	4th Generation Intel HM86 Chipset
GPU	Intel® HD Graphics 4600	Intel® HD Graphics 4600
Memory	4GB (up to 16 GB) 1333/1600 Mhz DDR3 RAM	4GB (up to 16 GB) 1333/1600 Mhz DDR3 RAM
Network	LAN: 10/100/1000 Mbps Ethernet WLAN: 802.11 b/g/n (802.11a/b/g/n optional) Bluetooth 4.0 (optional) 3G: N/A	LAN: 10/100/1000 Mbps Ethernet WLAN: 802.11 b/g/n (802.11a/b/g/n optional) Bluetooth 4.0 (optional) 3G: N/A
Storage	SSD 256 GB HDD 500 GB	SSD 256 GB HDD 500 GB
I/O Ports	1 x RJ45, 10/100/1000 Mbps Ethernet 2 x USB 3.0 Ports 2 x USB 2.0 Ports 1 x Headphone 3.5 mm jack 1 x Microphone 3.5 mm jack 2 x Wifi Antenna Connector	1 x RJ45, 10/100/1000 Mbps Ethernet 2 x USB 3.0 Ports 2 x USB 2.0 Ports 1 x Headphone 3.5 mm jack 1 x Microphone 3.5 mm jack 2 x Wifi Antenna Connector
Operating System	Windows 10	Windows 10
Accessory		
Standard	IB, Power Cord	IB, Power Cord
Optional	VPS	VPS
Certification		
Safety Approval	✓	✓
EMC Approval	✓	✓
CE	✓	✓

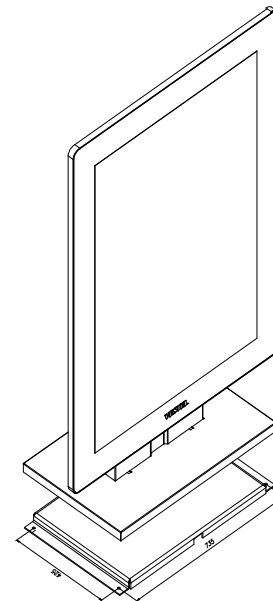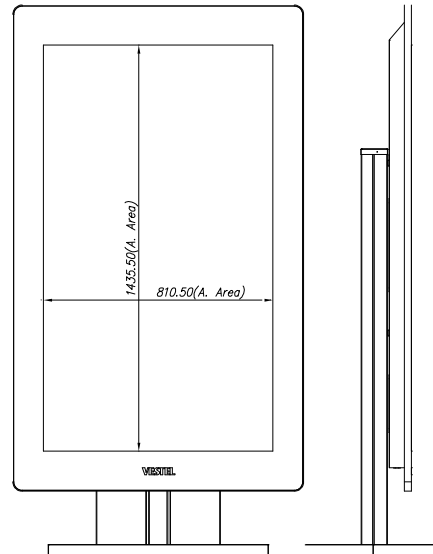

65 TOTEM	DIMENSIONS (mm-kg)			
	WIDTH (mm)	DEPTH (mm)	HEIGHT (mm)	VESA (mm)
PRODUCT W/FOOT	1028	488	1948	600x400
PRODUCT W/O FOOT	1028	77.5	1718	

